

LAW OFFICES

ANTONELLI, TERRY, STOUT & KRAUS, LLP

SUITE 1800

1300 NORTH SEVENTEENTH STREET

ARLINGTON, VIRGINIA 22209

DONALD R. ANTONELLI
DAVID T. TERRY
MELVIN KRAUS
WILLIAM I. SOLOMON*
GREGORY E. MONTONE
RONALD J. SHORE
DONALD E. STOUT
ALAN E. SCHIAVELLI
JAMES N. DRESSER
CARL I. BRUNDIDGE*
PAUL J. SKWIERAWSKI*

RANDALL S. SVIHLA
DAVID S. LEE*
ROBERT M. BAUER
PATRICK J. MILLS
H. BUI*

OF COUNSEL
DALE CURTIS HOGUE, SR.
CHITTARANJAN N. NIRMEL, PHD

PATENT AGENT
LARRY N. ANAGNO

TELEPHONE
(703) 312-6600

FACSIMILE
(703) 312-6666

E-MAIL
email@antonelli.com

June 29, 1999

Assistant Commissioner for Patents
Washington, DC 20231

Re: 312.104331R00

Sir:

Attached please find the reissue application papers of Kenneth O. Hill, et al covering improvements in METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING MASK AND MASK USED BY SAME, comprising:

Specification - Reissue of U.S. Patent No. 5,367,588, issued November 22, 1994, Forty-one (41) Claims and Abstract of the Disclosure (14 pages)

Reissue Declaration (3 pages)

Four (4) Sheets of Drawings showing Figs. 1-1b and 2-6

U.S. Government Filing Fee \$1,372.00

Reissue Application by the Assignee, Offer to Surrender Patent (1 page)

Statement Under 37 CFR 3.73(b) (1 page)

It is respectfully requested that a title report be prepared and that such title report be placed in the file of this reissue application.

06/29/99


U.S. PTO

06/29/99

06/29/99

Page 2

2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2809 2810 2811 2812 2813 2814 2815 2816 2817 2

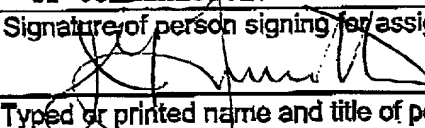REISSUE APPLICATION BY THE ASSIGNEE, OFFER TO SURRENDER PATENT		Docket Number (Optional)
This is part of the application for a reissue patent based on the original patent identified below.		
Name of Patentee(s): Kenneth O. Hill et al.		
Patent Number 5,367,588	Date Patent Issued November 22, 1994	
Title of Invention METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING MASK AND MASK USED BY SAME		
Her Majesty in Right of Canada as Represented by the Minister of Communications is the assignee of the entire interest in the original patent. I offer to surrender the original patent. <input checked="" type="checkbox"/> A certificate under 37 CFR 3.73(b) is attached. I am authorized to act on behalf of the assignee.		
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application, any patent issued thereon, or any patent to which this declaration is directed.		
Name of assignee Her Majesty in Right of Canada as Represented by the Minister of Communications		
Signature of person signing for assignee 	Date 29 Jan 98	
Typed or printed name and title of person signing for assignee Gerry Turcotte, President, Communications Research Centre		

Burden Hour Statement: This form is estimated to take 0.1 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

STATEMENT UNDER 37 CFR 3.73(b)

Applicant/Patent Owner: Kenneth O. Hill, et al.

Application No./Patent No.: 5,367,588

Filed/Issue Date: November 22, 1994

METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS
Entitled: PHASE GRATING MASK AND MASK USED BY SAME

Her Majesty in Right of Canada as
Represented by the Minister of
Communications

, a Government Agency

(Name of Assignee)

(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that it is:

1. ☒ the assignee of the entire right, title, and interest; or
2. ☐ an assignee of an undivided part interest

In the patent application/patent identified above by virtue of either:

A. ☒ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the Patent and Trademark Office at Reel 6404, Frame 0926, or for which a copy thereof is attached.

OR

B. ☐ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as shown below:

1. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.
2. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.
3. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet.

☐ Copies of assignments or other documents in the chain of title are attached.

NOTE: A separate copy (i.e., the original assignment document or a true copy of the original document) must be submitted to Assignment Division in accordance with 37 CFR Part 3, if the assignment is to be recorded in the records of the PTO. See MPEP 302-302.8.]

The undersigned (whose title is supplied below) is empowered to sign this statement on behalf of the assignee.

29 Jun 99
Date


Signature

Gerry Turcotte
Typed or printed name
President,
Communications Research Centre
Title

METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING MASK AND MASK USED BY SAME

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part application of U.S. application Serial No. 811,299, filed December 20, 1991, now U.S. Patent No. 5,216,739 which is a continuation-in-part application of U.S. application Serial No. 656,462, filed February 19, 1991, now U.S. Patent No. 5,104,209.

FIELD OF THE INVENTION

This invention relates to optical media such as optical fibers, and particularly to a method for fabricating Bragg gratings therein.

BACKGROUND TO THE INVENTION

Certain optical fiber waveguides exhibit the property of photosensitivity which provides a practical means for photoinducing permanent refractive index changes in the core of those fibers. Photosensitivity is not restricted to fiber structures: it has also been detected in several types of planar glass structures, including, for example, silica-on-silicon and ion-implanted silica waveguides devices.

The fabrication of optical waveguide devices such as intra-mode retro-reflecting Bragg gratings, mode convertor gratings, and rocking rotators have been achieved. The general approach for making these devices is to photoinduce a refractive index grating in the photosensitive core of the optical waveguide. The grating consists of a periodic modulation of the core's refractive index along the length of the waveguide. The period of the perturbation is chosen to bridge the momentum (propagation constant) mismatch between the two (normally bound) modes that the grating is designed to couple. At the resonant wavelength of the structure, phase-matched, efficient, power exchange between the coupled modes is possible.

There are two basic methods used for photoinducing gratings in photosensitive optical fiber waveguides: either by internal or by external writing. Internal writing is usually a holographic process where the modes to be coupled are launched as coherent bound modes of the waveguide and are allowed to modify, by a two-photon absorption process the refractive index of the waveguide core (i.e. form the hologram). Subsequent launching of one mode "reconstructs" the other. The activation wavelength for writing gratings internally in Germanium-doped high-silica glass is in the visible band (for example, at the 514.5 and 488.0 nm Argon-ion laser wavelengths) with corresponding two-photon energy in the U.V. band. External writing uses UV light directly (for germanium doped high-silica fiber, UV light tuned to, or in the vicinity of, the oxygen vacancy absorption band at 240 nm) incident from the side on the optical waveguide. External writing can be accomplished point-by-point, for mode convertor gratings, or using the holographic interference of two coherent UV beams for Bragg retro-reflectors.

Index gratings were first written in optical fibers using a technique described by K.O. Hill et al and disclosed in U.S. Pat. No. 4,474,427. The process requires launching into the core of a Ge-doped fiber strand light having a wavelength in the visible region. The light is reflected from the end of the fiber. The forward propagating light interferes with the backward propagating light to form a standing wave pattern with a period corresponding to half the wavelength of the writing light. Through a photosensitive effect in the fiber, a refractive index grating with this period is written in the core of the fiber. With this technique, only gratings can

034270-0669

be fabricated which reflect light having wavelengths close to the writing light.

An improvement on this technique for writing grating has been disclosed by Glenn et al in U.S. Pat. No. 4,807,950. In that process, the gratings are produced in the fiber by illuminating the fiber from the side with a coherent ultraviolet radiation having 245 nm wavelength. By using a two beam technique, an interference pattern is set up along the length of the fiber. The period of the pattern is controlled by controlling the angle between the interfering beams. Thus index gratings can be written in the fiber which will reflect light at much longer wavelengths.

A further improvement on the above-noted methods for writing gratings in optical fibers is the point-by-point writing technique which is disclosed in U.S. Pat. No. 5,104,209. In this patent, a point-by-point technique for writing gratings in fibers is disclosed in which each index perturbation in the grating is photoinduced individually through a slit-mask.

The principal drawbacks of the grating fabrication technique described in the first patent is that only gratings with a period similar to that of one half the wavelength of the writing light can be made. The second patent discloses a method of writing gratings with a different pitch. However, the technique requires an ultraviolet laser source with a high degree of spatial and temporal coherence. Such laser sources are research lasers that are expensive, have low writing efficiencies and are not suitable for use in a manufacturing environment. Furthermore, the technique does not provide full flexibility in the writing of apodized Bragg reflectors or chirped Bragg reflectors.

The point-by-point writing method is an effective technique for writing the coarse period gratings needed in spatial and polarization mode converters. However, this technique is not practical for writing Bragg gratings. In the case of Bragg gratings, the writing of each index perturbation individually requires high accuracy in the translation of the optical fiber in front of the slit. A more serious drawback, is the serial manner for writing the index perturbations forming the Bragg grating. That writing process needs a very long exposure time to fabricate a single Bragg reflector. U.S. Pat. No. 5,104,209 proposes to overcome this problem by the use of slit-masks to permit the writing of several index perturbations in a single operation.

SUMMARY OF THE INVENTION

In the present invention the index grating is imprinted in the core of the optical fiber using a specially designed silica glass phase grating mask. The phase mask is held in close proximity to the optical fiber. Laser irradiation of the phase mask with ultraviolet light at normal incidence imprints (photoinduces) into the optical fiber core the interference pattern created by the phase mask.

The present invention improves on the point-by-point writing technique by using a novel slit-mask for printing Bragg gratings in optical fibers and planar optical waveguides. The method is a non-holographic technique for writing Bragg retro-reflectors and is particularly applicable to photosensitive optical fiber, but the method applies as well to planar waveguide structures.

In accordance with an embodiment of the invention, a method of fabricating Bragg gratings in an optical medium is comprised of disposing a silica glass phase grating mask adjacent and parallel to a photosensitive

655250-204260

optical medium and applying a collimated light beam through the mask to the medium.

In accordance with another embodiment a phase grating slit-mask is used to modulate spatially the phase of a UV beam (for example, from an excimer laser) with pitch

$$\frac{\lambda_{Bragg}}{n_{Effective}}$$

where λ_{Bragg} is the desired resonant wavelength for retro-reflective intra-mode coupling in the fiber and $n_{Effective}$ is the effective index of the coupled modes at λ_{Bragg} .

In accordance with another embodiment, a grating mask is comprised of a slab of silica glass having parallel corrugations on a surface thereof forming a surface relief pattern.

BRIEF INTRODUCTION TO THE DRAWINGS

A better understanding of the invention will be obtained by reference to the detailed description below, in conjunction with the following drawings, in which:

FIG. 1 is a diagram of photolithographic apparatus for photo-imprinting a refractive index Bragg grating in a photosensitive optical fiber waveguide,

FIGS. 2, 3, 4 and illustrate additional diagrams of photolithographic apparatus for photo-imprinting a Bragg grating in an optical fiber, and

FIG. 6 is a graph of spectral response of a Bragg grating fabricated with a UV laser source and using phase-mask photolithography.

DETAILED DESCRIPTION OF THE INVENTION

A phase grating slit-mask 1 is used in a precision photolithographic apparatus and is placed in contact, or near-contact, with an optical fiber 3, its grating striations 5 (as illustrated in magnification 6 of the mask) directed normal or near normal to the fiber axis. A UV light beam 7 from a suitable laser, a KrF excimer laser (249 nm) in a successful prototype is passed through the mask 1 by which it is phase modulated spatially and is diffracted to form an interference pattern 9A laterally (Bragg grating pitch) and along the incident laser beam direction 9B (Talbot pitch) as illustrated in magnification 11 of the core of the fiber.

The slit-mask preferably is comprised of a one dimensional surface-relief structure as shown at 6 fabricated in a high quality fused silica flat transparent to the KrF excimer laser radiation. The shape of the periodic surface-relief pattern of the phase mask preferably approximates a square wave in profile, as shown at 6. The amplitude of the periodic surface-relief pattern is chosen to modulate by $\pi + 2\pi n$ radians ($n=0,1,2,3,\dots$) the phase of the UV light beam. In a successful prototype of the phase mask for a KrF excimer laser beam, the amplitude A of the surface relief pattern is given by

$$\frac{4\pi(n_{silica} - 1)A}{\lambda_{KrF}} = \pi,$$

where λ is the wavelength of the light used for writing (photoinducing) an index change in the optical medium, and n_{silica} is the refractive index of the silica used in forming the mask. This choice of surface-relief-grating amplitude results in a grating diffraction pattern for the design wavelength that nulls the zero-order diffracted

(through) beam. In practice, the zero-order beam 13 has been suppressed to less than 5% of the light diffracted by the mask. The principal beams 15 exiting our mask are the diverging plus-one and minus-one orders each of which contained typically more than 35% of the diffracted light.

The mask perturbations need not be shaped to a square wave. For example, zero-order nulled surface-relief phase-grating masks having perturbations with a sinusoid shape would be equally useful in our application.

To manufacture Bragg gratings with a length longer than the phase mask, a stop and repeat process can be used. In this process, the mask (or fiber) is translated precisely a distance corresponding to the fringe pattern length such that subsequent photoimprinted gratings reflect in phase with previously photoimprinted grating.

It is worth noting that the principal period of the mask's diffraction pattern is independent of wavelength. Therefore, in principle, it is possible to write a Bragg grating with a collimated broadband source, as long as the waveguide core is not located too far away from the phase mask during writing and the combined spectral width of the source and the photosensitive band of the waveguide material is not broader than the nulling bandwidth for the zero-order diffracted beam.

For photoimprinting Bragg reflectors, the preferred placement of the phase grating striations is normal to the fiber axis. Tilted index gratings can be photoimprinted by placing the phase grating striations at an angle to the fiber axis. Such index grating structures are useful for coupling core guided light out the fiber and into free space.

It should be noted that the preferred embodiment has the grating striations of the surface relief phase grating face the fiber. This configuration is not necessary for the phase grating to phase modulate the UV beam. A configuration with the striations facing away from the fiber functions will also work.

Phase gratings in which the phase modulation is produced by a refractive index modulation rather than a surface relief modulation will function as well. For example, the striations 5 of the mask shown in magnification 6 of FIG. 1 can be filled with glass material having a different index of refraction than the surrounding regions, producing alternating refractive indexes.

In order to test the performance of the photolithographic apparatus we have described for photo-imprinting a refractive Bragg grating in a photosensitive optical fiber waveguide, we selected two optical fibers known to be highly photosensitive. The first was an Andrew Corporation standard D-type polarization-maintaining fiber optimized for 1300 nm (cut-off=960 nm, beat length $L_B=1.02$ cm at 1292 nm, core/cladding $\Delta n=0.031$ and elliptical core size $1.5 \times 3 \mu\text{m}$) but which nonetheless exhibits sufficiently low loss at the Bragg resonant wavelength of 1531 nm that we use in our experiments. This fiber has a core that is highly doped with Germanium in comparison with standard telecommunications fiber; Germanium-doped fibers are usually photosensitive. In particular, Andrew D-type fiber has been reported to be strongly photosensitive (we measured unsaturated photoinduced refractive index changes of the order of 6×10^{-4}), an attribute linked to its relatively high Germanium dopant concentration. The second fiber was obtained from AT&T Bell Labo-

ratories and was specially formulated to be strongly photosensitive. Our experiments confirmed that the AT&T fiber was more photosensitive than the D-type fiber for the conditions prevalent during our experiments.

The UV source we used in our experiments was an unmodified Lumonics KrF excimer laser operated at 249 nm, with a beam cross-section $0.7 \times 2 \text{ cm}^2$, pulse duration 12 nsec and pulse repetition rate of 50 Hz. The unfocused energy density per pulse was 100 mJ per cm^2 . Such a laser produces a low coherence beam when no provision is made either to injection-lock or to filter spatially the beam. The only optimization we undertook in preparation for writing a Bragg grating was to place the phase mask grating with its striations parallel to the long dimension of the beam cross-section, because we determined experimentally that the spatial coherence is better for its placement than for an orthogonal placement.

Successful writing with low coherence beams was an important test of the performance of the present photolithographic Bragg grating photo-imprinting method. An advantage of Bragg grating photolithography is it provides a means for the fabrication of several devices in parallel, permits the use of proven, high-fluence, industrial laser sources and simplifies manufacturing alignment procedures.

The phase grating that we used in the successful prototype method was a surface-relief device manufactured on a high optical quality fused silica flat. The period of the grating was approximately 1060 nm with 249 nm zero-order diffracted beam nulled below 5% and 37% of transmitted light in each of the plus- and minus-one diffracted beams. The grating measured 1 mm square. The period of the Bragg grating photo-imprinted with the flat was 530 nm resulting in an estimated high-fused-silica-waveguide (refractive index=1.46) Bragg resonance wavelength of $530 \times 2 \times 1.46 = 1549 \text{ nm}$. We observed experimentally a resonance at 1531 nm.

The fluence level per pulse used for Bragg grating exposure was increased from 100 to 200 mJ/ cm^2 by mild focusing of the excimer laser beam, using a cylindrical lens aligned with cylinder axis parallel to the fiber. Typical exposure times are a few minutes long with fluence levels of 1 joule/ cm^2 per pulse and pulse rates of 50 ppc. The photoinduced Bragg grating reflectivity increases rapidly at the beginning of the exposure process and then saturates subsequently at a value related to the level of the incident fluence per pulse. A larger fluence level per pulse increases, to some limit, the saturated reflectivity of the ensuing Bragg grating. However, above a certain fluence level, a peak in reflectivity is obtained, and further photoexposure results in decreased reflectivity and at the same time the shape of the wavelength response of the Bragg grating changes significantly developing, for example, a notch at the center wavelength of the response.

It should be noted that a lens or lenses can be used for increasing the fluence level. For example, an embodiment is shown in FIG. 2.

A light source 19 is focussed by a cylindrical lens 21 to the core 23 of optical fiber 25, through phase grating slit mask 27, which has its face 29 containing the grating striations facing the fiber.

In another embodiment of the invention shown in FIG. 3, a spatial amplitude or filter 37 is disposed in front of the phase mask 27. The spatial amplitude filter

37 modifies the intensity profile 39 of the UV beam so it varies along the length of the phase grating in a predetermined way. The profile 39 indicates for example a UV beam with gaussian intensity profile. Illumination of the phase grating with the UV beam 19 results as before in an interface pattern. The envelope of the interference fringes however has the same intensity profile along the length the fiber as the intensity profile of the UV beam. The regions of high intensity result in a larger photoinduced refractive index change than the regions of low intensity. Thus an index grating can be formed in a fiber whose coupling strength varies in a predetermined way along the fiber length.

In another embodiment of the invention shown in FIG. 4, a phase grating 41 is used in which the grating period varies along the length of the grating in a predetermined manner, to form a chirped grating. Irradiation of the chirped phase grating with UV light 19 photoimprints an index grating (reflector) in the fiber core 23 that is also chirped. The spectral response of the chirped Bragg reflector is broader than that of the Bragg reflector resonant at a single wavelength.

Simultaneous use of the two embodiments shown in FIGS. 3 and 4 modulates spatially the phase and amplitude of the UV beam allowing independent control respectively of the resonant frequency and the strength of the resonance along the length of the Bragg reflector. This capability permits the synthesis of useful spectral response characteristics such as an apodized Bragg reflector.

FIG. 5 illustrates an embodiment of the invention in which the lens is located between the mask 27 and the optical fiber 25. An opaque blocker 33 is located between the mask and the lens to block the zero order light beam 35. Opaque beam blockers 36 are also located between the mask and the lens to block light diffracted into beams higher than the first order. The plus one and minus one orders of the light beam are passed through the lens.

The advantage of this embodiment is that only the first order diffracted beams are used in forming the interference fringes and high contrast fringes are obtained. A further advantage is that the lens can be used for reducing the image size of the fringe pattern. Thus lenses that produce different image reductions will photoimprint Bragg gratings with different resonant frequencies from the same phase grating. Also, the pitch of the phase grating can be longer thus relaxing the difficulty in manufacturing the phase grating. Finally, the lens provide a means for increasing the fluence levels on the irradiated optical core.

FIG. 6 illustrates a spectral response graph 17 of a Bragg grating photo-imprinted through the above-described phase mask in the embodiment of FIG. 1 into the Andrew Corp. D-type fiber. The 249 nm KrF excimer laser irradiated the fiber for 20 minutes with 100 mJ/cm² pulses at 50 pps. A peak reflectivity of 16% was achieved in a grating estimated to be approximately 0.95 mm long, which is calculated assuming a uniform in-fiber grating and using the 0.85 nm spectral width of the response, the 530 nm pitch of the Bragg grating and the 1531 nm Bragg resonance wavelength. The sidebands in the spectral response are clearly visible, suggesting that the grating is substantially uniform along its entire length. From the grating reflectivity data we calculated (in the tightly bound mode limit) the amplitude for the refractive index modulation to be 2.2×10^{-4} . This value compares favourably with the average refractive index

change which we determined to be 6×10^{-4} from the shift in Bragg grating resonance during photo-exposure and knowledge of the fiber's effective index dispersion at 1531 nm. Ideally, we expect the apparent modulation depth to be the same or larger than the average index change when we expose fibers to maximum-contrast grating-diffraction patterns. The depth-to-average-index change ratio is influenced by the following intrinsic factors: non-linearities in the photosensitive response of the fiber, the less-than-perfect nulling of the zero-order beam, the presence of higher-order diffracted beams down stream from the mask and the low coherence of the laser source. It is also influenced by fiber/-mask alignment during fabrication: the reflectivity of the photoinduced Bragg grating will be reduced if the grating is tilted with respect to the fiber axis. The low reflectivity from tilting translates to a reduced apparent depth of modulation of the refractive index. Tilting does not affect the increase in the average refractive index due to photoexposure.

A Bragg grating spectral response similar to FIG. 6 was observed for a Bragg grating written under similar conditions but using the special AT&T fiber. In that case the peak reflectivity reached 25%.

In comparison to other methods of making in-fiber Bragg gratings, the technique of photolithographic imprinting through the phase mask as described herein offers much flexibility for modifying the pitch and the strength of the Bragg grating coupling coefficient, $\kappa(z)$, as a function of distance z along the waveguide axis. Intricate variations in pitch can be written into the phase mask during its fabrication e.g. under computer control; a spatial amplitude mask can be used as well to grade the strength of the coupling coefficient. Simultaneous use of these two techniques to modulate spatially the phase and amplitude of the UV writing beam allows independent control respectively of the resonant frequency and the strength of resonance along the waveguide Bragg grating written with the mask, making the synthesis of some useful spectral responses possible.

The surface-relief phase grating masks used have been found to tolerate fluence levels per pulse of 1 J/cm² without damage. Because fused quartz has a damage threshold per pulse of about 5 J/cm² under KrF excimer laser irradiation, it seems likely that these phase masks can tolerate even higher fluence levels.

Using a fluence level per pulse of 1 J/cm² we photoimprinted a Bragg grating with 30% reflectivity in Andrew D-fiber after a 5 minute 50 Hz exposure.

The present invention thus provides a simple method for fabricating high-quality Bragg gratings in photosensitive optical waveguides, using low coherence lasers suitable for industrial environments. The combination of phase mask photo-imprinting with single-pulse writing of in-fiber Bragg gratings could yield high-performance, low-cost devices.

A person understanding this invention may now conceive of alternative structures and embodiments or variations of the above. All of those which fall within the scope of the claims appended hereto are considered to be part of the present invention.

We claim:

1. A method of fabricating Bragg gratings in the interior of an optical waveguide comprising disposing a silica glass phase grating mask adjacent and parallel to a photosensitive optical waveguide and applying a single collimating light beam through the mask to said optical waveguide as a medium.

2. A method as defined in claim 1 in which the mask has a surface relief pattern selected to modulate by approximately $\pi + 2\pi n$ radians the phase of the light beam, wherein

$$\frac{4\pi(n_{\text{silica}} - 1)A}{\lambda} = \pi + 2\pi n$$

where A is the amplitude of the surface relief pattern, $n=0,1,2,3$, λ is the wavelength of the light used for writing (photoinducing) an index change in the optical medium and n_{silica} is the refractive index of the silica used in the mask at λ .

3. A method as defined in claim 2 in which the surface relief pattern in cross-section is a square-wave.

4. A method as defined in claim 2 in which the surface relief pattern in cross-section is a sine wave.

5. A method as defined in claim 1 in which the light beam is an ultraviolet light beam.

6. A method as defined in claim 5 in which the light beam is a laser beam.

7. A method as defined in claim 1 in which the light beam is provided by a KrF excimer laser.

8. A method as defined in claim 1 in which the optical medium is an optical fiber.

9. A method as defined in claim 8 in which striations of the phase mask grating are oriented orthogonal to or nearly orthogonal to the axis of the fiber.

10. A method as defined in claim 8 in which striations of the phase mask grating are oriented at an angle to the axis of the fiber.

11. A method as defined in claim 9 in which the light beam is provided by a KrF excimer laser.

12. A method as defined in claim 11 in which the mask has a surface relief pattern selected to modulate by approximately $\pi + 2\pi n$ $n=0,1,2,3$, radians the phase of the light beam, wherein

$$\frac{4\pi(n_{\text{silica}} - 1)A}{\lambda} = \pi + 2\pi n$$

$n=0,1,2,3$ where A is the amplitude of the surface relief pattern, λ is the wavelength of the light and n_{silica} is the refractive index of the silica material used to make the mask at λ .

13. A method as defined in claim 12 in which the surface relief pattern in cross-section is a square-wave.

14. A method as defined in claim 13, in which a large dimension of the light beam cross-section is oriented parallel to striations of the phase mask grating.

15. A method as defined in claim [8] 10 in which the striations are chirped.

16. A method as defined in claim 9 in which the striations are chirped.

17. A method as defined in claim 9 in which the phase mask contains variations in either or both of pitch and amplitude of the striations.

18. A method as defined in claim 11 in which the light beam is an ultraviolet beam.

19. A method as defined in claim 1 including locating a refracting lens between the mask and the optical medium prior to applying the light beam.

20. A method as defined in claim 19 including placing an opaque blocking means for the zero order light beam between the mask and the lens prior to applying the light beam.

21. A method as defined in claim 19 including placing opaque blocking means for the zero and second order light beams between the mask and the lens prior to applying the light beam.

22. A method as defined in claim 1 further including a spatial amplitude light filter for shaping the beam profile prior to passing through the phase grating.

23. A method as defined in claim 22 in which the filter is coated on a face of the mask opposite to a face containing the phase grating.

24. A method as defined in claim 2, then repeatedly moving one of the mask and medium relative to the other a distance corresponding to the fringe pattern and applying said collimating light beam through the mask to said medium, such that subsequent photoimprinted gratings reflect in phase with previously photoimprinted gratings.

25. A grating mask comprising a slab of silica glass having parallel corrugations on a surface thereof form-

ing a surface relief pattern, the pattern containing variations in at least one of pitch and amplitude of the corrugations.

26. A grating means comprising a slab of silica glass having parallel corrugations on a surface thereof forming a surface relief pattern, including a spacial amplitude light filter coated on a surface of the slab opposite to the surface carrying said pattern.

27. A grating as defined in claim 25 further including a spacial amplitude light filter coated on a surface of the slab opposite to the surface carrying said pattern.

28. A grating means comprising a slab of silica glass having parallel corrugations on a surface thereof forming a surface relief pattern, in which the corrugation are filled with transparent material having an index of refraction different from that of the silica glass.

29. A grating as defined in claim 28 in which the transparent material is comprised of glass.

* * * * *

30. A method of fabricating Bragg gratings in the interior of an optical waveguide comprising disposing a silica glass phase grating mask adjacent and parallel to a photosensitive optical waveguide and applying a single collimating light beam through the phase grating to said optical waveguide as a medium, said phase grating mask being a slab of silica glass having parallel corrugations on a surface thereof forming a surface relief pattern.

31. A method according to claim 30, wherein the surface relief pattern contains variations in at least one of pitch and amplitude of the corrugations.

32. A method of fabricating Bragg gratings in the interior of an optical waveguide comprising disposing a silica glass phase grating mask adjacent and parallel to a photosensitive optical waveguide and applying a single collimating light beam through the phase grating mask to said optical waveguide as a medium, wherein the phase grating mask is configured so as to substantially suppress at at least one portion thereof a zero-order diffracted light beam of the light beam which passes through the phase grating mask.

33. A method according to claim 32, wherein the zero-order diffracted light beam is suppressed to less than 5% of the light diffracted by the phase grating mask.

34. A method according to claim 32, wherein plus one and minus one orders of the diffracted light beam are utilized for fabricating the Bragg gratings in the interior of the optical waveguide.

35. A method according to claim 32, wherein the Bragg gratings are substantially permanently fabricated in the interior of the optical waveguide.

36. A method according to claim 35, wherein the optical waveguide is an optical fiber.

37. A method according to claim 32, wherein the phase grating mask is configured so as to induce different phase in at least two adjacent portions of the light beam which passes through the phase grating mask.

38. A method according to claim 32, wherein the phase grating mask has a surface relief pattern formed thereon.

39. A method according to claim 38, in which the surface relief pattern in cross-section is a square-wave.

40. A method according to claim 38, in which the surface relief pattern in cross-section is a sine wave.

41. A method according to claim 38, wherein the phase grating mask has the surface relief pattern selected to modulate by approximately $\pi+2$ radians the phase of the light beam, wherein

$$\frac{4\pi(n_{\text{silica}} - 1)A}{\lambda} = +2\pi n$$

where A is the amplitude of the surface relief pattern, $n = 0, 1, 2, 3$, λ is the wavelength of the light used for writing (photoinducing) an index change in the optical medium and n_{silica} is the refractive index of the silica used in the mask at λ .

ABSTRACT

An index grating is imprinted in the core of an optical fiber using a specially designed silica glass phase grating mask. The phase mask is held in close proximity to the optical fiber. Laser irradiation of the phase mask with ultraviolet light at normal incidence imprints (photoinduces) into the optical fiber core the interference pattern created by the phase mask.

FIG. 1a

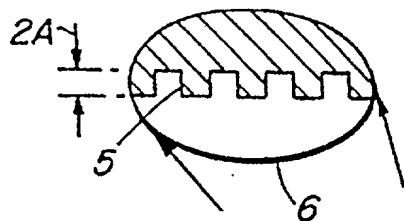


FIG. 1


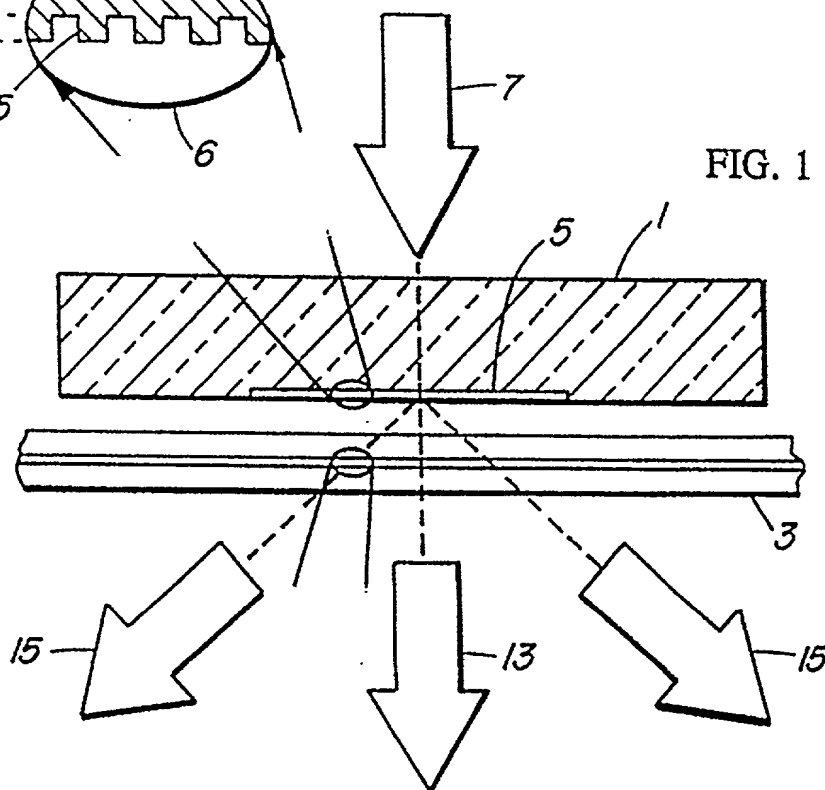


FIG. 1b



666290-40424660

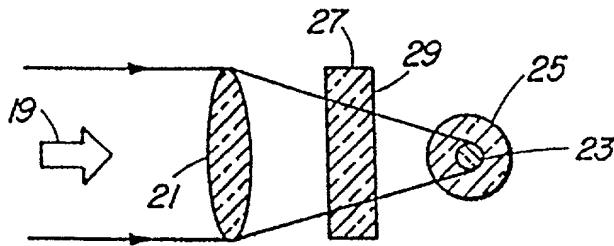


FIG. 2

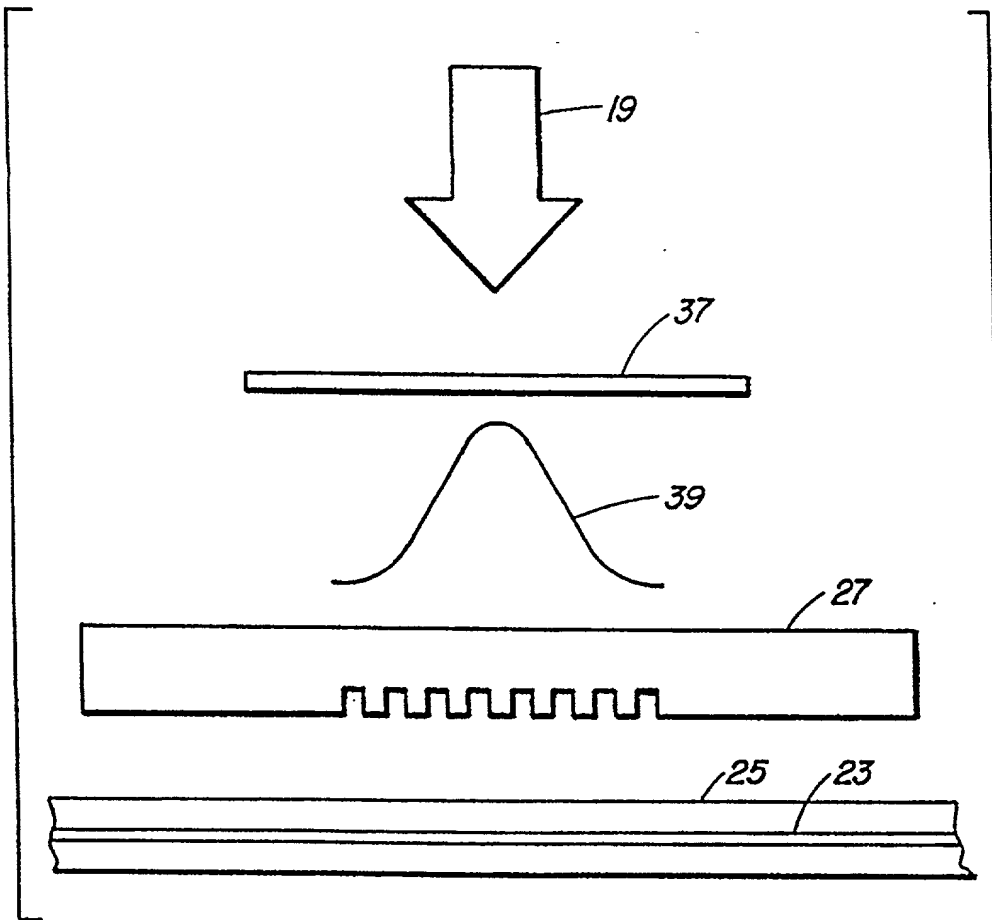


FIG. 3

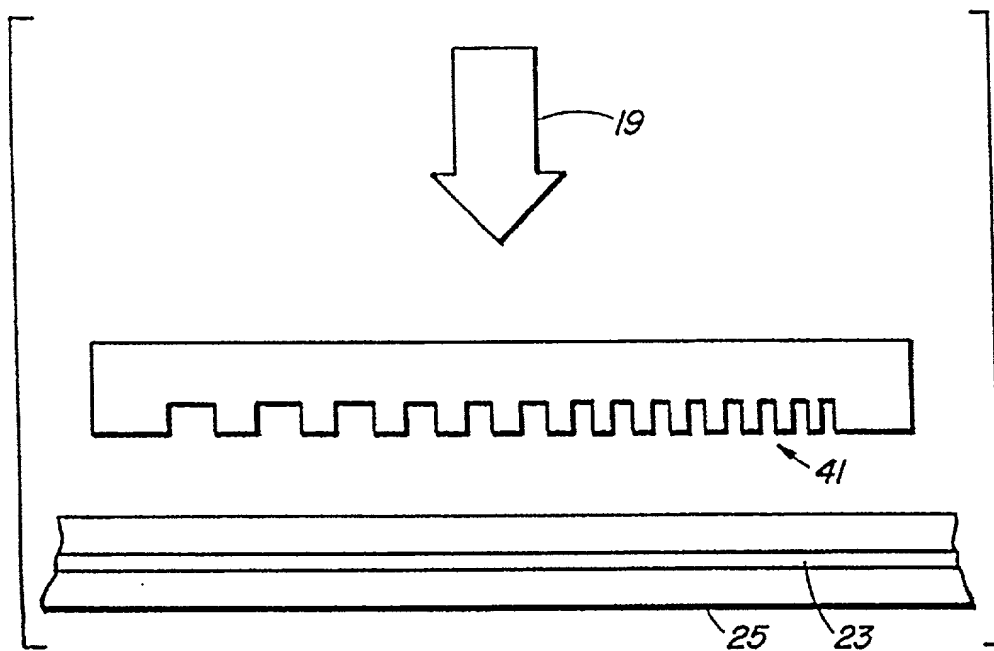


FIG. 4

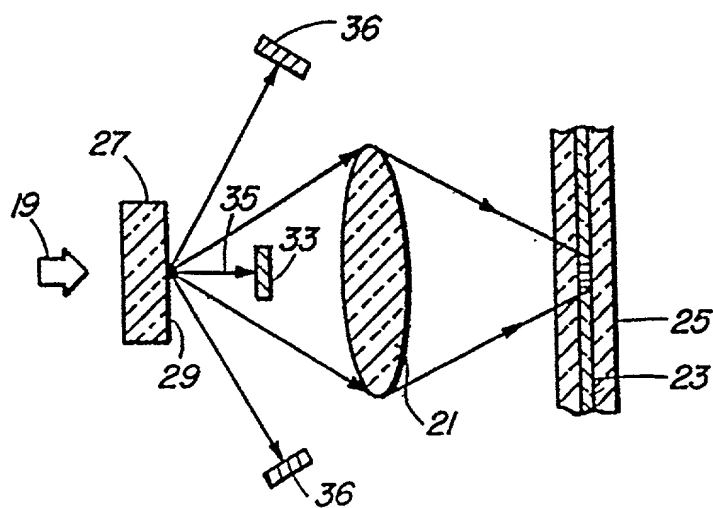


FIG. 5

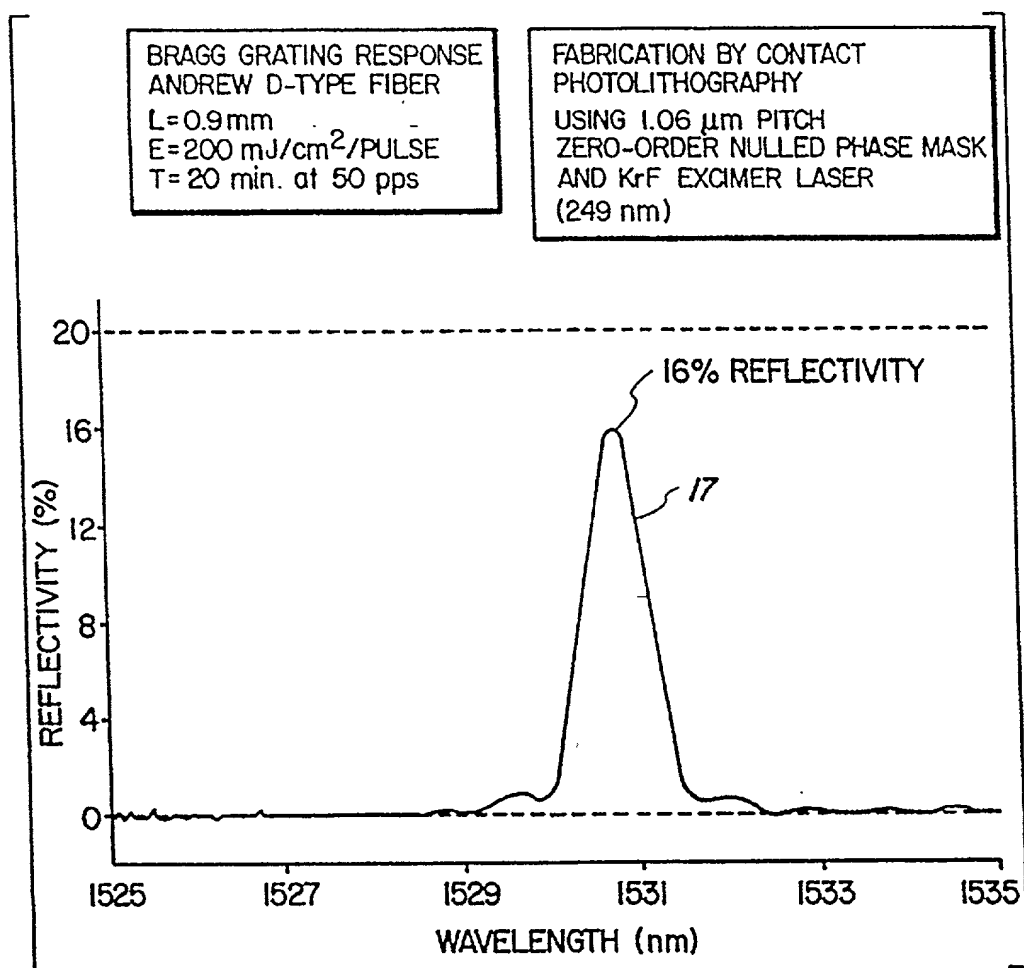


FIG. 6

REISSUE APPLICATION DECLARATION BY THE ASSIGNEE		Docket Number (Optional)
<p>I hereby declare that: My residence, post office address and citizenship are stated below next to my name. I am authorized to act on behalf of the assignee: <u>Her Majesty in Right of Canada as Represented by the Minister of Communications</u> and the title of my position with said assignee: <u>President, Communications Research Centre</u> The entire title to the patent identified below is vested in said assignee</p>		
Name of Patentee(s): <u>Kenneth O. Hill, et al.</u>		
Patent Number <u>5,367,588</u>	Date Patent Issued <u>November 22, 1994</u>	
Title of Invention <u>METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING MASK AND MASK USED BY SAME</u>		
<p>I believe said patentee(s) to be the original, first and sole or joint inventor(s) of the subject matter which is described and claimed in said patent, for which a reissue patent is sought on the invention entitled _____ <u>See Attachment 1</u> the specification of which</p> <p><input checked="" type="checkbox"/> is attached hereto.</p> <p><input type="checkbox"/> was filed on _____ as reissue application number ____ / _____ and was amended on _____ (If applicable)</p> <p>I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.</p> <p>I verily believe the original patent to be wholly or partly inoperative or invalid, for the reasons described below. (Check all boxes that apply.)</p> <p><input checked="" type="checkbox"/> by reason of a defective specification or drawing.</p> <p><input checked="" type="checkbox"/> by reason of the patentee claiming more or less than he had the right to claim in the patent.</p> <p><input type="checkbox"/> by reason of other errors.</p> <p>At least one error upon which reissue is based is described as follows: <u>See Attachment 2</u></p>		

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.5 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

SCANNED9

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

(REISSUE APPLICATION DECLARATION BY THE ASSIGNEE, page 2)

Docket Number (Optional)

All errors corrected in this reissue application arose without any deceptive intention on the part of the applicant.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Name(s)


Registration Number

Melvin Kraus22,466William I. Solomon28,565Gregory E. Montone28,141

Correspondence Address: Direct all communications about the application to:

☒ Customer Number020457

Type Customer Number here



OR

☒ Firm or Individual NameANTONELLI, TERRY, STOUT & KRAUS, LLP

Address

1300 North 17th Street

Address

Suite 1800

City

Arlington

State

VA

ZIP

22209

Country

Telephone

(703) 312-6600

Fax

(703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine and imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this declaration is directed.

Full name of person signing (given name, family name)

Garry Turcotte

Signature

Date

29 Jun 99

Residence

Citizenship

Canadian

Post Office Address

1640 Bear Hill Road Carp, Ontario

Addendum

Attachment 1

METHOD OF FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING MASK AND MASK USED BY SAME

Attachment 2

The original patent failed to recite the relationship of the original patent with the parent applications of U.S. Patent Nos. 5,216,739 and 5,104,209 and failed to claim benefit thereof under 35 U.S.C. 120; and claim 15 of the original patent did not have proper antecedent basis for "the striations" so that claim 15 has been amended to depend from claim 10 rather than claim 8.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below:

(application Serial No.)	(Filing Date)	(status)
656,462	February 19, 1991	patented (5,104,209)
811,299	December 20, 1991	patented (5,216,739)

SCANNED

DONALD R. AN
DAVID T. TERRY
MELVIN KRAUS
WILLIAM I. SOLOMON*
GREGORY E. MONTONE
RONALD J. SHORE
DONALD E. STOUT
ALAN E. SCHIAVELLI
JAMES N. DRESSER
CARL I. BRUNDIDGE*
PAUL J. SKWIERAWSKI*

RANDALL S. SVIHLA
DAVID S. LEE*
ROBERT M. BAUER
DEMETRA J. MILLS
HUNG H. BUI*

*ADMITTED OTHER THAN VA

LAW OFFICES
ANTONELLI, TERRY, STOUT & KRAUS, LLP
SUITE 1800
1300 NORTH SEVENTEENTH STREET
ARLINGTON, VIRGINIA 22209

OF COUNSEL
DALE CURTIS HOGUE, SP
CHITTARANJAN N. NIRMEL, PhD*

PATENT AGENT
LARRY N. ANAGNOS

TELEPHONE
(703) 312-6600
FACSIMILE
(703) 312-6666
E-MAIL
email@antonelli.com

June 29, 1999

Assistant Commissioner for Patents
Washington, DC 20231

Re: 312.104331R00

Sir:

Attached please find the reissue application papers of
Kenneth O. Hill, et al covering improvements in METHOD OF
FABRICATING BRAGG GRATINGS USING A SILICA GLASS PHASE GRATING
MASK AND MASK USED BY SAME, comprising:

Specification - Reissue of U.S. Patent No. 5,367,588,
issued November 22, 1994, Forty-one (41) Claims and
Abstract of the Disclosure (14 pages)

Reissue Declaration (3 pages)

Four (4) Sheets of Drawings showing Figs. 1-1b and 2-6

U.S. Government Filing Fee \$1,372.00

Reissue Application by the Assignee, Offer to
Surrender Patent (1 page)

Statement Under 37 CFR 3.73(b) (1 page)


It is respectfully requested that a title report be
prepared and that such title report be placed in the file of this
reissue application.

SCANNED

Assistant Commissioner for Patents
June 29, 1999
Re: 312.104331R00
Page 2

Please charge any shortages in the fees or credit any overpayment thereof to the Deposit Account of Antonelli, Terry, Stout & Kraus, LLP, Account No. 01-2135 (312.104331R00).

Respectfully submitted,



Melvin Kraus
Registration No. 22,466
ANTONELLI, TERRY, STOUT & KRAUS, LLP

MK/cee
Attachments
(703) 312-6600

SCANNED